

STANDARD FEATURES

- Non-Overcenter Articulating Aerial Device
- Platform Access from the Ground
- Low Stow, Easy Access Platform
- Easy Access to Body Compartments from Platform
- Low Life-Cycle Cost
- Compensated Upper Boom
- Insulated, ANSI Category C, 46 kV and Below
- Continuous Rotation
- Side Mounted Platform 24 x 24 x 42 in (610 x 610 x 1067 mm)
- Platform Capacity 300 lbs (136 kg)
- Positive Platform Leveling
- Fully Metered Single Handle Upper Control
- Full Pressure, Open Center Hydraulic System
- Designed and Manufactured in ISO 9001 Certified Facility

RECOMMENDED FEATURES

- Wheel Chocks
- Platform Liner
- Fall Protection System
- With Outrigger Option:
 - Outrigger Interlock System
 - Outrigger Motion Alarm
 - Outrigger Pads

GENERAL SPECIFICATIONS


Ground to Bottom of Platform* (at Distance from Centerline)	32.3 ft (10.5 ft)	9.9 m (3.2 m)
Maximum Reach (@Platform Height)	19.5 ft (16.5 ft)	5.9 m (5.0 m)
Stowed Travel Height	9.1 ft	2.8 m
Platform Capacity	300 lb	136 kg
Boom Articulation		
Upper		-0° to +95°
Lower		-54° to +63°
Rotation		Continuous
Weight of Unit	1890 lb	857 kg

*Based on 40 in (1016 mm) Chassis Frame Height

OPTIONS

- ANSI, Category B, 46 kV and Below
- Emergency Operating System
- Engine Start/Stop
- Outriggers, Modified A-Frame
- Platform, 24 x 30 x 42 in (610 x 762 x 1067 mm)
- Platform Cover
- Throttle Control
- Tool Circuit at Platform
- Tool Circuit at Tailshelf


REACH DIAGRAM

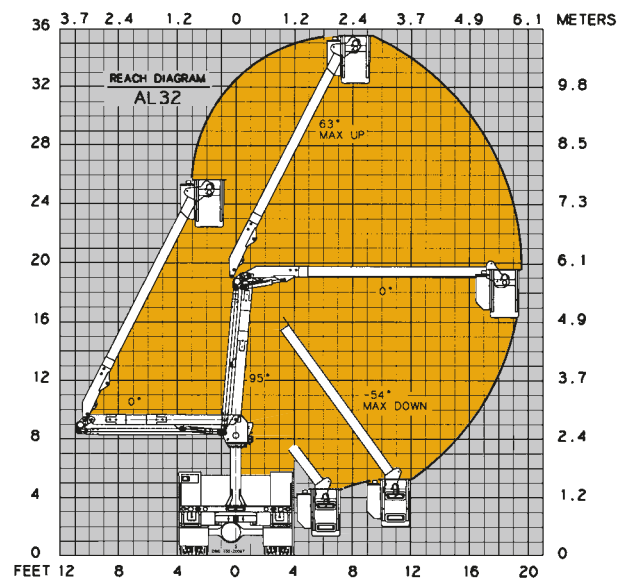

Altec Aerial Devices meet or exceed all applicable ANSI Standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice or obligation.



Easy Platform Access from Ground

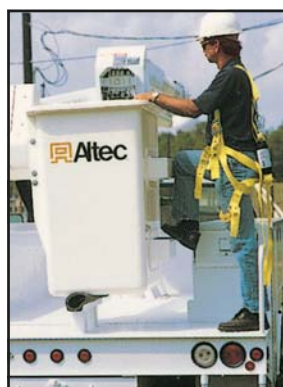

Low Stow Platform



Access to Body Compartments from Platform

Altec Sales and Service



Manufacturing and Service Facilities Located Throughout the United States and Canada

Altec Industries, Inc.

Post Office Box 10264
Birmingham, Alabama 35202
Phone 205/991-7733
Fax 205/991-9993



Altec AL32 Articulating Aerial Device

- Versatile Service Vehicle
- Working Height to 37 ft (11.3 m)
- Side Reach to 19.5 ft (5.9 m)
- Low Stow Platform for Easy Access
- Platform Access from Ground
- Mounts on One-Ton Chassis

