

STANDARD FEATURES

- Boom Storage Protection System
- Operator Ground Control Station Isolates Operator from Ground
- Steel Boom Flares for Pole Setting
- Five (5) Function Hydraulic Overload Protection System
- Four (4) Manually Articulating, Hydraulic Extending Outriggers including Dedicated Switch to Operate all Legs Simultaneously
- Outrigger/Boom Interlock System, Outrigger Motion Alarm
- Outrigger/Unit Selector Control
- Fully Proportional 2,500 ft*lbs. Digger and 18" Auger, Carbide Teeth
- Winch, Hook, and Synthetic Rope with 3,000 lbs. Rating
- Owner Selectable Preventative Maintenance Cycles
- Insulated, "46 kV and Below"
- Track Driven Carrier with Retractable Tracks to 34"
- Pendant Carrier Drive Controls
- 23.5 hp Diesel Engine and Direct Drive Pump
- 12 Gallon Fuel Tank
- Adjustable Boom Rest

GENERAL SPECIFICATIONS

| | | |
|--|---------------|---------------|
| Maximum Lift Capacity | 3,000 lb | 1,361 kg |
| Maximum Capacity at 10' radius | 2,590 lb | 1,175 kg |
| Pole Setting Sheave Height | 34.9 ft | 10.6 m |
| Reach from Centerline of Rotation | 30.2 ft | 9.2 m |
| Dig Radius from Centerline of Rotation | Minimum | 10.5 ft 3.2 m |
| | Maximum | 19.5 ft 6.9 m |
| Boom Articulation, degrees | -6 to 75 | |
| Rotation | 250 degrees | |
| Digger Capacity | 2,500 ft*lbs | 3.39 kNm |
| Maximum Driving Slope | Side-to-Side | 10 degrees |
| | Front-to-Back | 15 degrees |
| Travel Width, Minimum | 34 in | 864 mm |
| Travel Height, approximate* | 6.6 ft | 2.0 m |

* Not based on chassis frame height of 40 inches (1016 mm) per ANSI A10.31-1995. This unit includes a dedicated carrier and does not apply.




OPTIONS

- 10,000 lbs. GVWR Trailer
- 8' Fiberglass Material Handling Jib
- Platform, 300 lbs. Capacity
- Platform Cover
- Platform Liner
- Platform or Liner Scuff Pads
- Power Inverter for 110 VAC
- Cargo Platform, Fold Out
- Hydraulic Tools Below Rotation
- Radio Remote Controls
- Docking Station for Radio
- Remote Controls at Platform
- Pole Puller
- Pole Guides, Manual Tilt
- Pole Carrier Bracket
- Pole Dolly
- Turf Protection Mats, Set of 4

RECOMMENDED FEATURES

- Fall Protection System
- Platform Liner
- Wheel Chocks
- Outrigger Pads

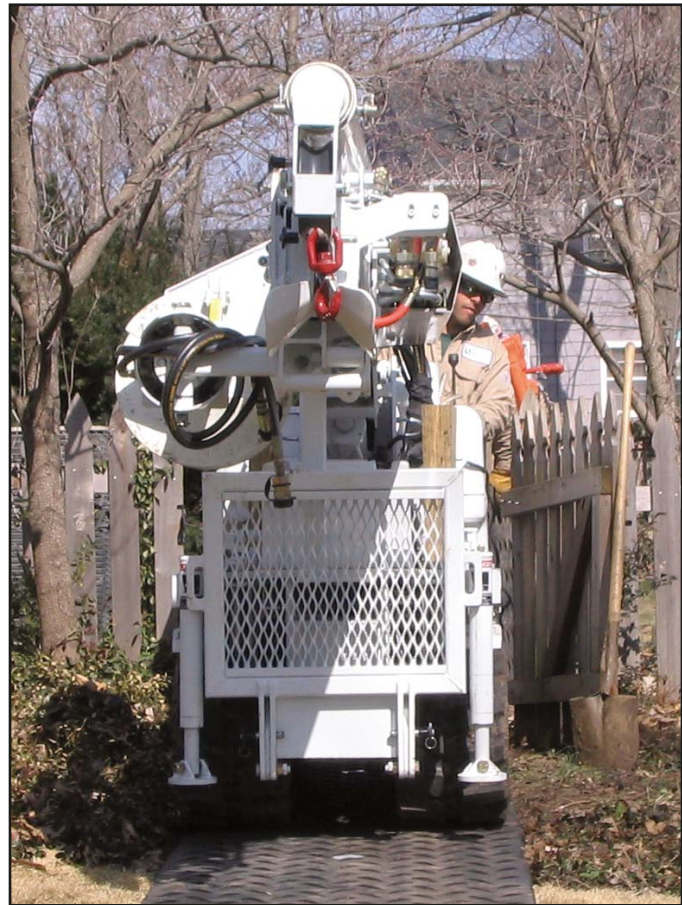

Altec Digger Derricks meet or exceed all applicable ANSI Standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice.

Remove the difficulty of backyard jobs with the Altec DB35, a tool that helps utility crews work Safer & Smarter.

Altec Sales and Service



Altec Industries, Inc.
 Post Office Box 10264
 Birmingham, Alabama 35202
 Phone 205.991.7733
 Fax 205.991.9993