



Altec L37M

Overcenter Material Handling Aerial Device



- Working Height 42 ft (12.8 m)
- Up To 1100 lb (499 kg) Material Handling Capacity
- Material Handling Capacity Is Not Reduced by Lower Boom Angle
- Low Stow Platform Feature
- Ability to Reach Compartments from Platform
- No Scheduled Major Component Replacement
- 350 lb (159 kg) Platform Capacity

STANDARD FEATURES

- Overcenter Articulating Aerial Device
- Material Handling System with Hydraulic Tilting, Manual Extend Jib
- Insulated, ANSI Category C, 46 kV and Below
- Lower Boom Insulator, 7 in (18 mm)
- Low Stow Platform
- Altec Patented Walking Link
- Continuous Rotation
- Side Mounted Platform 24 x 30 x 42 in (610 x 762 x 1067 mm)
- Platform Capacity 350 lb (159 kg)
- Hydraulic/Mechanical Platform Leveling System
- Hydraulic Platform Tilt
- Single Handle Control at the Platform
- Full Pressure Open Center Hydraulic System
- Hydraulic Tool Circuit at Boom Tip
- A-Frame Outriggers, One Set

GENERAL SPECIFICATIONS

Platform Height*	37 ft	11.3 m
Maximum Sidereach Non-Overcenter	25 ft	7.6 m
Stowed Travel Height	9.3 ft	2.8 m
Platform Capacity	350 lb	159 kg
Boom Articulation		
Upper	205°	
Lower	98°	
Rotation	Continuous	

*Based on 36 in (914 mm) Chassis Frame Height

Altec Aerial Devices meet or exceed all applicable ANSI Standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice or obligation.



Altec L37M offers easy body compartment access from the platform.


OPTIONS

- Diagnostic Test Kit
- Throttle Control
- Emergency Operating System
- Engine Start/Stop
- Lower Boom Lifting Eye
- Platform Cover
- Tool Circuit at the Tail Shelf
- Insulated ANSI Category B, 46 kV and below
- Hydraulically Extendible Jib
- Platform Rotator

RECOMMENDED FEATURES

- Fall Protection System
- Outrigger Interlock System
- Outrigger Motion Alarm
- Platform Liner
- Wheel Chocks
- Outrigger Pads

REACH DIAGRAM

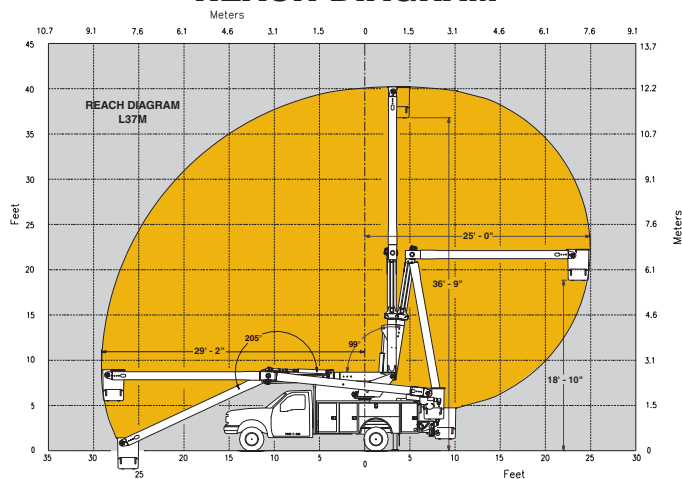

Low stow feature, low center of gravity and low travel height offers operator easy platform access, a stable driving unit and the ability to maneuver in low overhead areas.

Altec Sales and Service