




BROKEN TAP REMOVER

QUICK SOLUTION TO BROKEN TAP, NO MORE HEADACHE !

Fast, low cost, high performance,
JOEMARS TR100 BROKEN TAP REMOVER,
your most reliable partner!

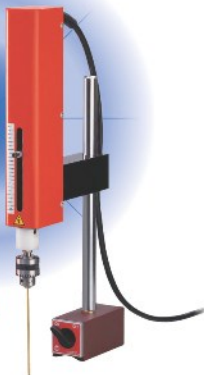

FEATURES:


- **Light, small, portable, compact design.**
- **High speed & high efficiency and low cost.**
- **Simple operation, easily remove broken tap.**
- **Full power source choices:**
100V/110V/120V/200V/220V/230V/240V,
1 PHASE, 50HZ/60HZ.
- **Dielectric:**
Using ordinary tap water as machining dielectric liquid.
- **Electrode:**
Using any brass bar as electrode.
- **Flexibility:**
Machining easily even on a large workpiece.
- **No damage:**
Remove taps easily without damage the threads.
- **Complete functions:**
Auto feed, depth setting (stop at a specific depth),
selectable arcing timer, auto retract, workhead swivel
alarm messages: depth arrival, arcing, over-temp.
- **More applications:**
Starting holes for Wire Cut EDM.
Cutting Tungsten Carbide or any harden steel.

MACHINING APPLICATIONS:

SMALL WORKPIECE




LARGE WORKPIECE




NON-VERTICAL MACHINING



HOW TO REMOVE BROKEN TAP:



WORKHEAD SWIVEL:




SPECIFICATIONS:

GENERATOR:
Weight: 17Kgs
Dimensions: 290X345X285 mm
MACHINE UNIT:
Weight: 6Kgs with magnetic stand
Dimensions: 53X70X375 mm
Electrode Holder : Max. $\varnothing 6.5$ mm

* All specifications & design are subject to change without notices.

DIMENSIONS:



STANDARD ACCESSORIES:

- | | |
|------------------|----------------------------|
| 1. Generator | 5. Brass electrode bar |
| 2. Machine unit | $\varnothing 1.5$ mm x4PCS |
| 3. Chemical clay | $\varnothing 2.0$ mm x2PCS |
| 4. Chuck handle | $\varnothing 2.5$ mm x2PCS |
| | $\varnothing 3.0$ mm x2PCS |
| | $\varnothing 4.0$ mm x1PC |
| | $\varnothing 5.0$ mm x1PC |
| | $\varnothing 6.0$ mm x1PC |



JOEMARS MACHINERY & ELECTRIC INDUSTRIAL CO., LTD.

No. 66, Lane124, Sec.1, Youyuan Road, Tatu Hsiang, Taichung Hsien, Taiwan 432

Tel: 886-4-2691-7566 Fax: 886-4-2691-7556

http://www.joemars.com.tw E-mail: joemars@ms11.hinet.net

CAT-2095-07-4006